


# 43 Inch Molded Case 4K Monitor

MW3243-F-V

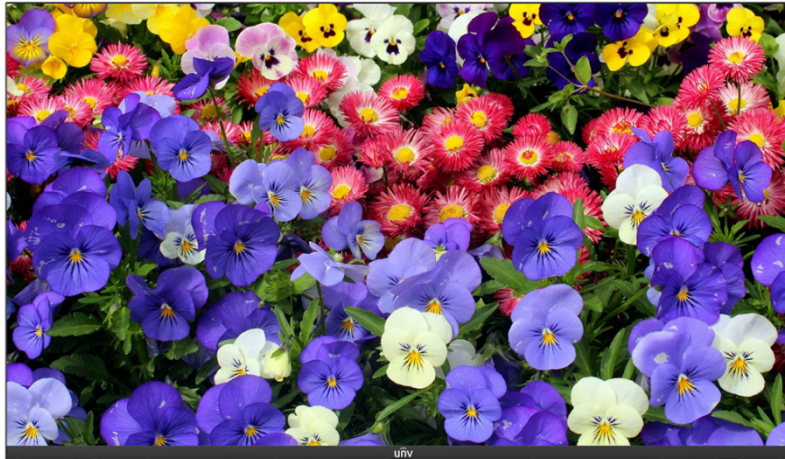

## Features



- 4K UHD display.
- Stable structure design, highly durable, ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Industrial-grade panel, 24/7 continuous operation.
- The automatic color and image enhancing engine effectively improves the contrast, details, and edges of the images and to render optimum colors.
- Wide 178° viewing angles allow viewing from almost any direction.
- Silent operation, offering a quiet working environment.
- VESA standard mount enables easy installation.
- Flexible wall mount and stand mount, saving space.

## Specifications


|           |            |
|-----------|------------|
| Model     | MW3243-F-V |
| Panel     |            |
| Backlight | LED        |

|                                     |   |
|-------------------------------------|---|
| Panel Size                          | 43"   |
| Pixel Pitch (H × V) (mm)            | 0.245 x 0.245   |
| Resolution                          | 3840 × 2160   |
| Color Support                       | 1.07 B  |
| Brightness (cd/m <sup>2</sup> )     | 300   |
| Contrast Ratio                      | 1000:1  |
| Refresh Rate                        | 60 Hz   |
| Response Time (ms)                  | 14  |
| Viewing Angle (H/V)                 | Horizontal 178°, Vertical 178°  |
| Display Size (mm)                   | 941.184 x 529.416   |
| Operation Hour                      | 24/7  |
| <b>Interface</b>                    |   |
| Video Input                         | 2 x HDMI, 2 x DP  |
| Audio Output                        | 3.5mm Headphone Jack  |
| <b>Speaker</b>                      |   |
| Speaker                             | 2 x 5 W   |
| <b>VESA</b>                         |   |
| VESA (mm)                           | 200 x 200   |
| Wall-mounted Thread                 | M6 (10mm Deep Thread)   |
| <b>OSD</b>                          |   |
| Multi-Language                      | English, French, German, Spanish, Italian, Dutch, Korean, Simplified Chinese, Traditional Chinese |
| <b>General</b>                      |   |
| Input Voltage                       | AC 100 ~ 240 V, 50/60 Hz  |
| Typical Power Consumption (W)       | ≤90   |
| Standby Power Consumption (W)       | ≤0.5  |
| Product Dimensions (W × H × D) (mm) | 964.4 x 560.9 x 94.9  |
| Package Dimensions (W × H × D) (mm) | 1055 x 645 x 130  |
| Weight (kg)                         | Net Weight: 6.8<br>Gross Weight: 8.6  |
| Operating Temperature               | 0°C ~ 40 °C   |
| Operating Humidity                  | 20% ~ 85% (No Condensation)   |
| Storage Temperature                 | -10°C ~ 60°C  |
| Storage Humidity                    | 10% ~ 90% (No Condensation)   |
| Standard                            | 1 x HDMI cable, 1 x Quick Guide, 1 x Remote Control, 1 x Power Cable                              |

# Dimensions

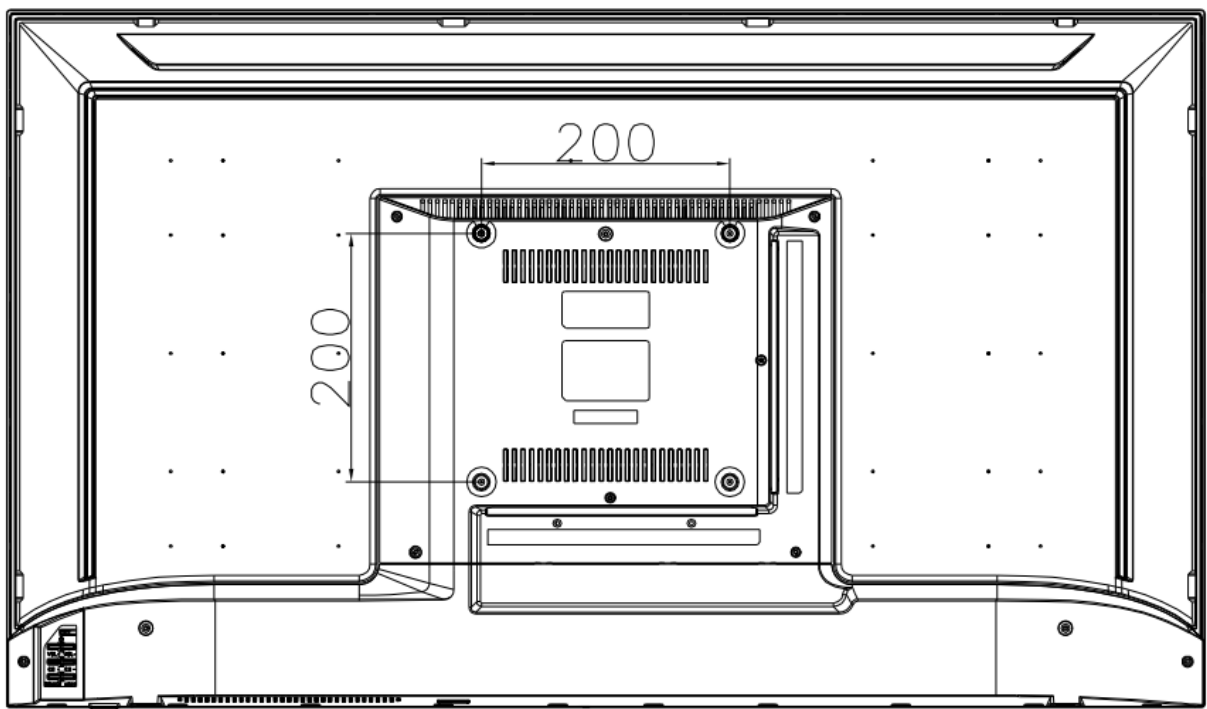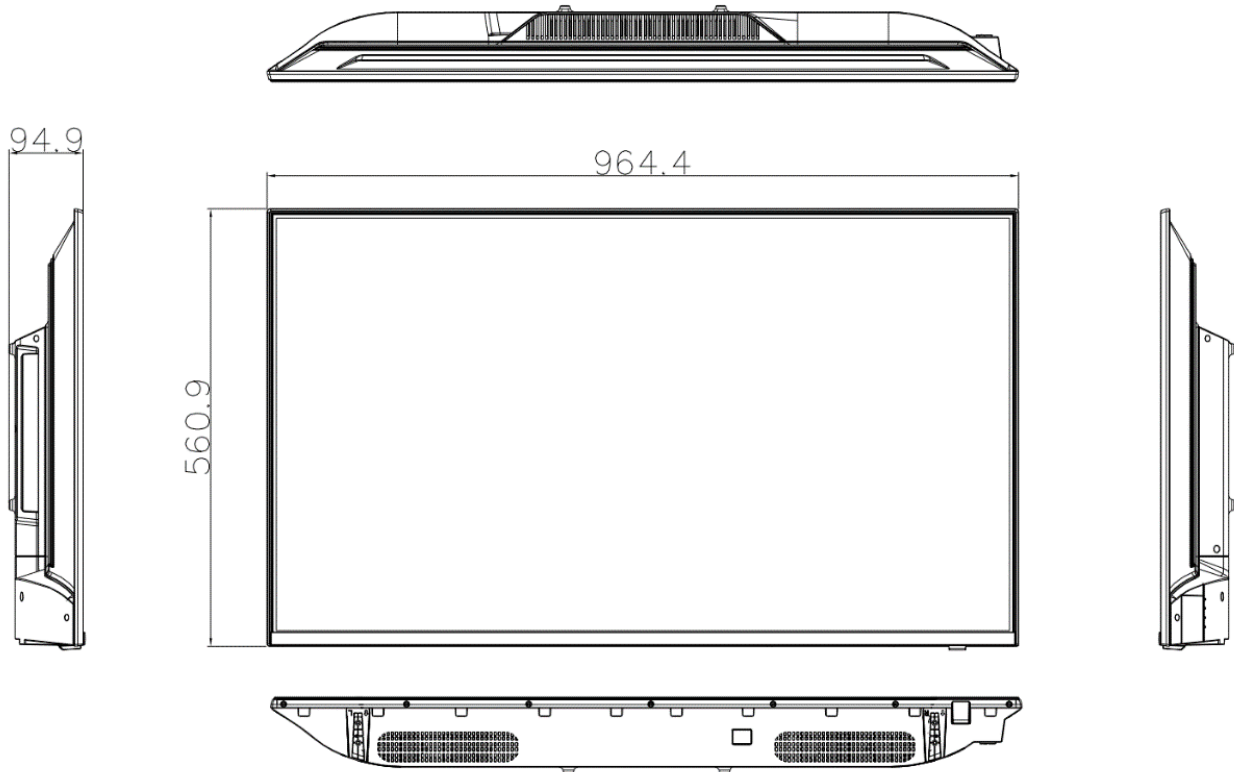

## Interface

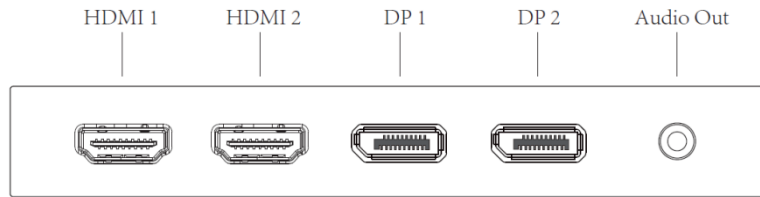

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.