

55 Inch Molded Case 4K Monitor

MW3255-F-V



Features



- 4K UHD display.
- Stable structure design, highly durable, ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Industrial-grade panel, 24/7 continuous operation.
- The automatic color and image enhancing engine effectively improves the contrast, details, and edges of the images and to render optimum colors.
- Wide 178° viewing angles allow viewing from almost any direction.
- Silent operation, offering a quiet working environment.
- VESA standard mount enables easy installation.
- Flexible wall mount and stand mount, saving space.

Specifications


Model	MW3255-F-V
Panel	
Backlight	LED

Panel Size	55"
Pixel Pitch (H × V) (mm)	0.315 x 0.315
Resolution	3840 × 2160
Color Support	1.07 B
Brightness (cd/m ²)	300
Contrast Ratio	1000:1
Refresh Rate	60 Hz
Response Time (ms)	14
Viewing Angle (H/V)	Horizontal 178°, Vertical 178°
Display Size (mm)	1209.6 x 680.4
Operation Hour	24/7
Interface	
Video Input	2 x HDMI, 2 x DP
Audio Output	3.5mm Headphone Jack
Speaker	
Speaker	2 x 5 W
VESA	
VESA (mm)	200 x 200
Wall-mounted Thread	M6 (10mm Deep Thread)
OSD	
Multi-Language	English, French, German, Spanish, Italian, Dutch, Korean, Simplified Chinese, Traditional Chinese
General	
Input Voltage	AC 100 ~ 240 V, 50/60 Hz
Typical Power Consumption (W)	≤115
Standby Power Consumption (W)	≤0.5
Product Dimensions (W × H × D) (mm)	1234.6 x 715.9 x 74.8
Package Dimensions (W × H × D) (mm)	1322 x 818 x 141
Weight (kg)	Net Weight: 9.4 Gross Weight: 11.8
Operating Temperature	0°C ~ 40 °C
Operating Humidity	20% ~ 85% (No Condensation)
Storage Temperature	-10°C ~ 60°C
Storage Humidity	10% ~ 90% (No Condensation)
Standard	1 x HDMI cable, 1 x Quick Guide, 1 x Remote Control, 1 x Power Cable

Dimensions

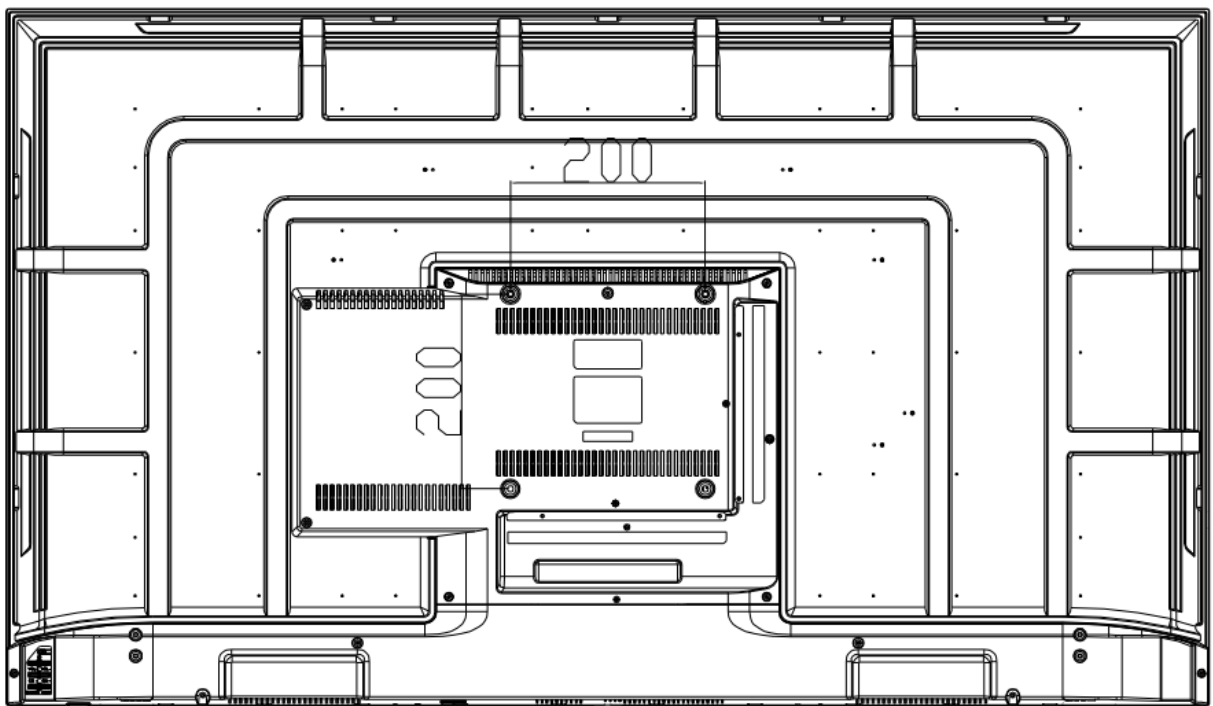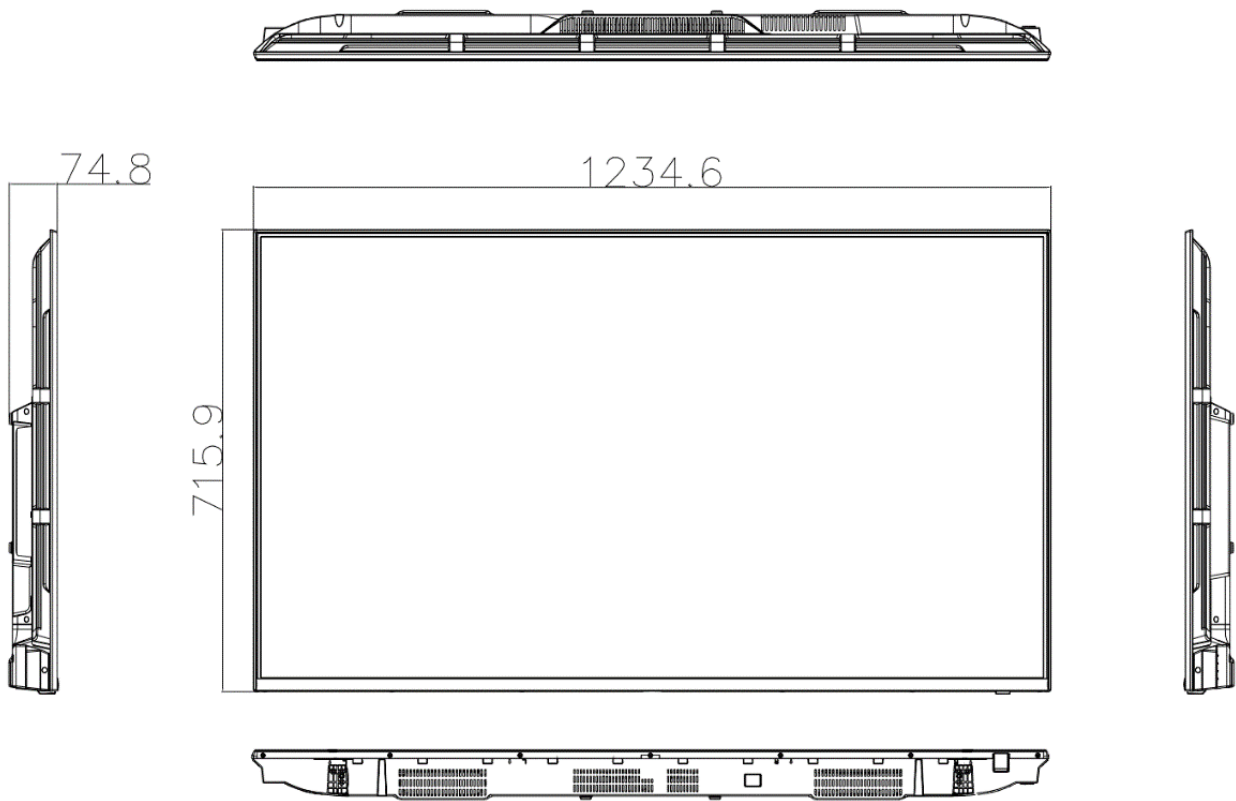

Interface

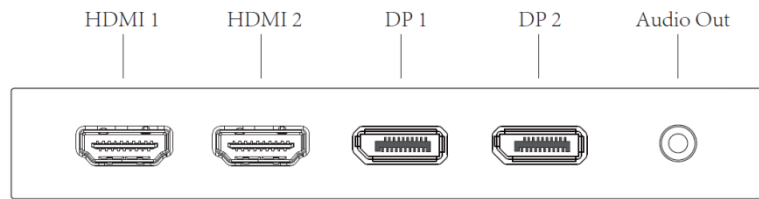

Zhejiang Uniview Technologies Co., Ltd.

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China (Zhejiang) Pilot Free Trade Zone, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2023-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.

*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.